

## Go IP65 Square

3,7W / 300lm / 3000K / On/Off / Flood 60° /  
50x50mm

64865



Design: O/M

Ceiling-recessed luminaire made of aluminium die-cast.

Recessing system with spring clips.

LED CRI>90 / >50.000h, L80/B10  
3-step MacAdam / Power supply not included  
IP65 | 100mA



LED	3000K	Light Source	Luminaire
Power		3,7W	3,7W
Flux		395lm	300lm
Efficiency		107lm/W	81lm/W
LOR		-	76%
UGR		-	<22



Beam angle  
Flood 60°

Application



Weight  
0.08Kg



45x45



Finishes

- .04 Matt White
- .05 Matt Black

Mandatory

**59088** Driver On/Off [100mA]

138x30x21mm

**59089** Driver DALI [100mA]

144x30x21mm

**59090** Driver PhaseCut [100mA]

122x41x23mm


**59091** Driver 1-10V [100mA]

130x30x20mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: [support@om-light.com](mailto:support@om-light.com)

Data according to regulations


2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class F  
Model Identifier BXRH-30G1000-B-83

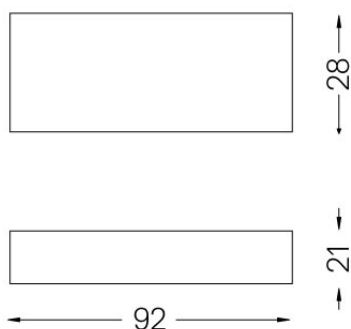

## Go IP65 Square

Driver DALI [1 luminaire]



59088



Driver On/Off for Go ø50 [100mA]  
230Vac | 50/60Hz | Class II

Weight  
0,1Kg


Finishes  
.99

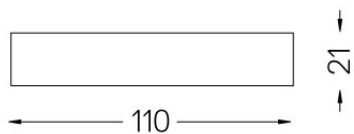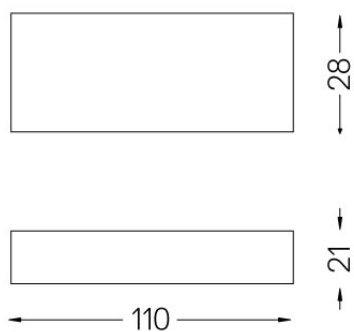

## Go IP65 Square

Driver DALI [1 luminaire]



59089



Driver DALI for Go ø50 [100mA]  
230Vac | 50/60Hz | Class II


Weight  
0,06Kg

Finishes  
.99



Go  
IP65 Square

Driver PhaseCut [1 luminaire] 59090



Driver PhaseCut for Go ø50  
[100mA]  
230Vac | 50/60Hz | Class II

Weight	Finishes
0,08Kg	.99



## Go IP65 Square

Driver 1-10V [1 luminaire]

59091



Driver 1-10V for Go ø50 [120mA]  
230Vac | 50/60Hz | Class II

Weight  
0,07Kg

Finishes  
.99

