

3,7W / 310lm / 3500K / Medium 26° /  
50x50mm

64866



Design: O/M  
Ceiling-recessed luminaire made of aluminium die-cast.  
Recessing system with spring clips.

LED CRI>90 / >50.000h, L80/B10  
3-step MacAdam / Power supply not included  
IP65 | 100mA




LED	3500K	Light Source	Luminaire
Power		3,7W	3,7W
Flux		410lm	310lm
Efficiency		111lm/W	84lm/W
LOR		-	76%
UGR		-	<10



Beam angle	Medium 26°
Application	
Weight	0.08Kg



45x45

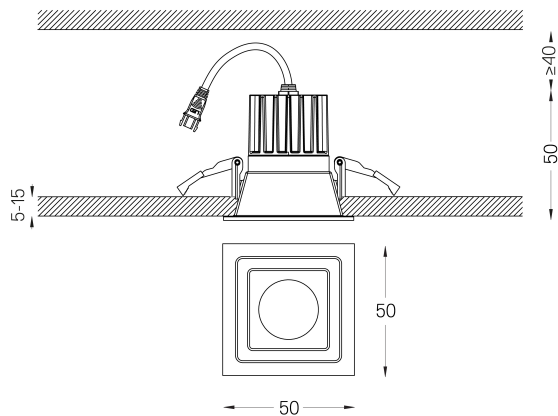

- Finishes
- .04 Matt White
  - .05 Matt Black

Mandatory  
**59088** Driver On/Off [100mA]  
138x30x21mm  
**59089** Driver DALI [100mA]  
144x30x21mm  
**59090** Driver PhaseCut [100mA]  
122x41x23mm  
**59091** Driver 1-10V [100mA]  
130x30x20mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations  
2019/2020/EU supplemented by 2021/341 |2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class F  
Model Identifier BXRH-35G1000-B-83