

3,7W / 310lm / 3500K / On/Off / Flood 60° /
50x50mm

64868



Design: O/M


Ceiling-recessed luminaire made of aluminium die-cast.

Recessing system with spring clips.

LED CRI>90 / >50.000h, L80/B10
3-step MacAdam / Power supply not included
IP65 | 100mA



LED	3500K	Light Source	Luminaire
Power	3,7W	3,7W	3,7W
Flux	410lm	310lm	310lm
Efficiency	111lm/W	84lm/W	84lm/W
LOR	-	76%	76%
UGR	-	<22	<22



Beam angle
Flood 60°


Application



Weight
0.08Kg



45x45

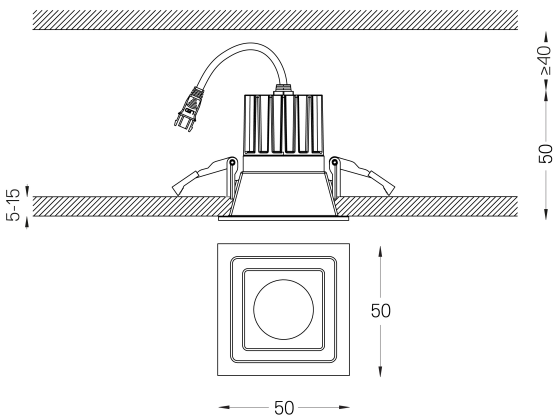

Finishes

- .04 Matt White
- .05 Matt Black

Mandatory

59088 Driver On/Off [100mA]

138x30x21mm

59089 Driver DALI [100mA]

144x30x21mm

59090 Driver PhaseCut [100mA]

122x41x23mm


59091 Driver 1-10V [100mA]

130x30x20mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations


2019/2020/EU supplemented by 2021/341 |2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains a light source of efficiency class F
Model Identifier BXRH-35G1000-B-83

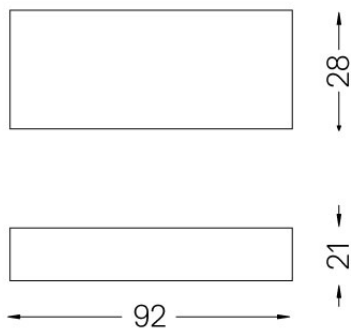

Go IP65 Square

Driver DALI [1 luminaire]


59088



Driver On/Off for Go ø50 [100mA]
230Vac | 50/60Hz | Class II

Weight
0,1Kg


Finishes
.99

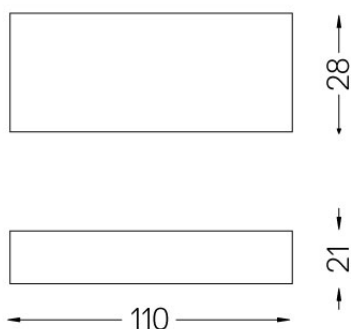

Go IP65 Square

Driver DALI [1 luminaire]



59089



Driver DALI for Go ø50 [100mA]
230Vac | 50/60Hz | Class II

Weight
0,06Kg

Finishes
.99



Go
IP65 Square

Driver PhaseCut [1 luminaire] 59090



Driver PhaseCut for Go ø50
[100mA]
230Vac | 50/60Hz | Class II


Weight	Finishes
0,08Kg	.99



Go IP65 Square

Driver 1-10V [1 luminaire]

59091



Driver 1-10V for Go ø50 [120mA]
230Vac | 50/60Hz | Class II

Weight
0,07Kg

Finishes
.99

