

3,7W / 315lm / 4000K / On/Off / Medium 26°  
/ 50x50mm

64869



Design: O/M  
Ceiling-recessed luminaire made of aluminium die-cast.  
Recessing system with spring clips.


LED CRI>90 / >50.000h, L80/B10  
3-step MacAdam / Power supply not included  
IP65 | 100mA



LED	4000K	Light Source	Luminaire
Power		3,7W	3,7W
Flux		415lm	315lm
Efficiency		112lm/W	85lm/W
LOR		-	76%
UGR		-	<10



Beam angle	Medium 26°
Application	
Weight	0.08Kg

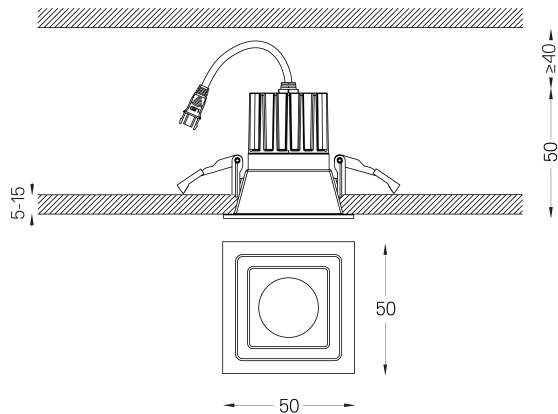

- Finishes
- .04 Matt White
  - .05 Matt Black

Mandatory  
**59088** Driver On/Off [100mA]  
138x30x21mm  
**59089** Driver DALI [100mA]  
144x30x21mm  
**59090** Driver PhaseCut [100mA]  
122x41x23mm  
**59091** Driver 1-10V [100mA]  
130x30x20mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com


Data according to regulations  
2019/2020/EU supplemented by 2021/341 |2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class F  
Model Identifier BXRH-40G1000-B-83



## Go IP65 Square

Driver DALI [1 luminaire]



59088




Driver On/Off for Go ø50 [100mA]  
230Vac | 50/60Hz | Class II

Weight  
0,1Kg

Finishes  
.99

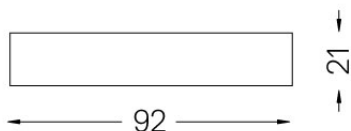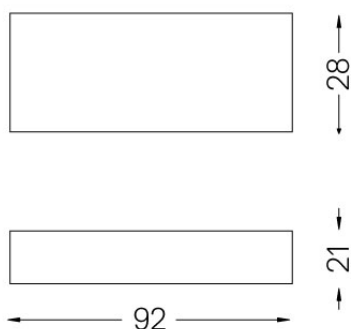


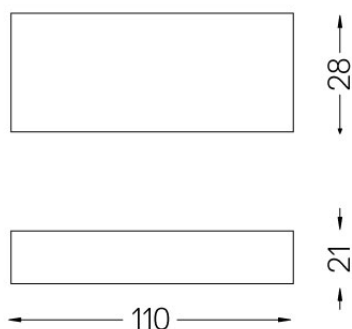

## Go IP65 Square

Driver DALI [1 luminaire]



59089



Driver DALI for Go ø50 [100mA]  
230Vac | 50/60Hz | Class II

Weight  
**0,06Kg**

Finishes  
**.99**



Go  
IP65 Square

Driver PhaseCut [1 luminaire] 59090



Driver PhaseCut for Go ø50  
[100mA]  
230Vac | 50/60Hz | Class II


Weight	Finishes
0,08Kg	.99



## Go IP65 Square

Driver 1-10V [1 luminaire]

59091



Driver 1-10V for Go ø50 [120mA]  
230Vac | 50/60Hz | Class II

Weight  
0,07Kg

Finishes  
.99

