

3,7W / 315lm / 4000K / Flood 60° /
50x50mm

64871



Design: O/M


Ceiling-recessed luminaire made of aluminium die-cast.

Recessing system with spring clips.

LED CRI>90 / >50.000h, L80/B10
3-step MacAdam / Power supply not included
IP65 | 100mA




| LED | 4000K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power | | 3,7W | 3,7W |
| Flux | | 415lm | 315lm |
| Efficiency | | 112lm/W | 85lm/W |
| LOR | | - | 76% |
| UGR | | - | <22 |



Beam angle
Flood 60°



Weight
0.08Kg

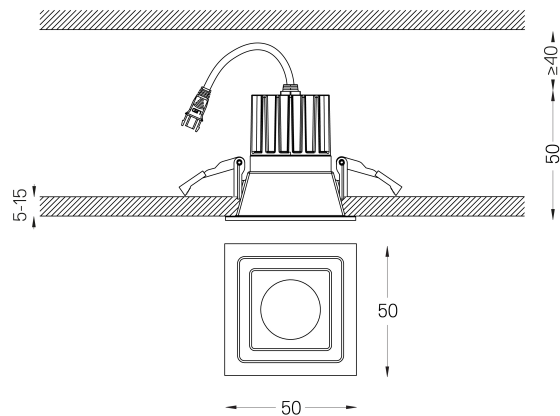

Finishes

- .04 Matt White
- .05 Matt Black

Mandatory

- 59088** Driver On/Off [100mA]
138x30x21mm
- 59089** Driver DALI [100mA]
144x30x21mm
- 59090** Driver PhaseCut [100mA]
122x41x23mm
- 59091** Driver 1-10V [100mA]
130x30x20mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 |2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains a light source of efficiency class F
Model Identifier BXRH-40G1000-B-83