



Go
IP65 Square

6,7W / 3,7W / 520lm / 290lm / 3000K /
On/Off / Spot 20° / 75x75mm


64875



Design: O/M
Ceiling-recessed luminaire made of aluminium die-cast.
Recessing system with spring clips.

LED CRI>90 / >50.000h, L80/B10
3-step MacAdam / Power supply not included
IP65 | 180mA / 100mA



 LED	3000K	Light Source	Luminaire
Power	6,7W / 3,7W		6,7W / 3,7W
Flux	685lm / 380lm		520lm / 290lm
Efficiency	102lm/W		78lm/W
LOR	-		76%
UGR	-		<16



Beam angle
Spot 20°



Weight
0.21Kg



65x65



Finishes

- .04 Matt White
- .05 Matt Black

Mandatory



- 59093** Driver On/Off [180mA]
147x43x30mm
- 59092** Driver On/Off [100mA]
92x28x21mm
- 59095** Driver DALI [180mA]
144x30x21mm
- 59094** Driver DALI [100mA]
144x30x21mm
- 59097** Driver Phase-Cut [180mA]
102x49x29mm
- 59096** Driver Phase-Cut [100mA]
122x41x23mm
- 59099** Driver 1-10V [180mA]
130x30x20mm
- 59098** Driver 1-10V [120mA]
130x30x20mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

The 5-year guarantee applies only when the luminaire and driver are supplied together.


Data according to regulations

2019/2020/EU supplemented by 2021/341 [2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class F
Model Identifier BXRH-30G1000-B-83

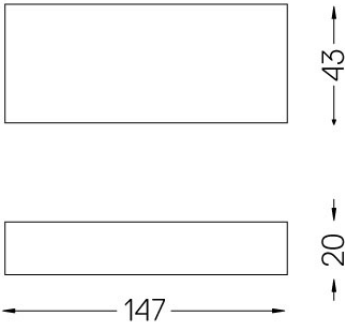

Go
IP65 Square

Driver On/Off [1 luminaire] 59093



Driver On/Off for Go ø75 [180mA]
230Vac | 50/60Hz | Class II

Weight
0,08Kg

Finishes
.99



Go IP65 Square

Driver On/Off [1 luminaire]



59092





Driver On/Off for Go ø75 [100mA]
230Vac | 50/60Hz | Class II

Weight
0,1Kg


Finishes
.99

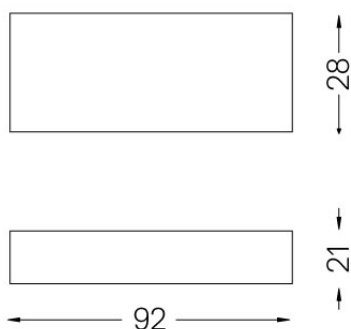



Go
IP65 Square



Driver DALI [1 luminaire] **59095**



Driver DALI for Go ø75 [180mA]
230Vac | 50/60Hz | Class II


Weight
0,08Kg

Finishes
.99

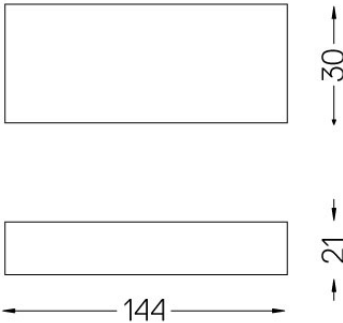

Go
IP65 Square



Driver DALI [1 luminaire] 59094



Driver DALI for Go ø75 [100mA]
230Vac | 50/60Hz | Class II


Weight
0,08Kg

Finishes
.99



Go
IP65 Square

Driver PhaseCut [1 luminaire] 59097



Driver PhaseCut for Go ø75
[180mA]
230Vac | 50/60Hz | Class II


Weight	Finishes
0,13Kg	.99



Go IP65 Square

Driver PhaseCut [1 luminaire]



59096




Driver PhaseCut for Go ø75
[100mA]
230Vac | 50/60Hz | Class II

Weight
0,07Kg

Finishes
.99

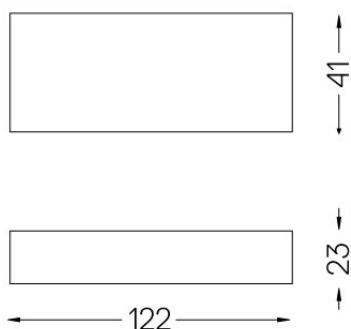


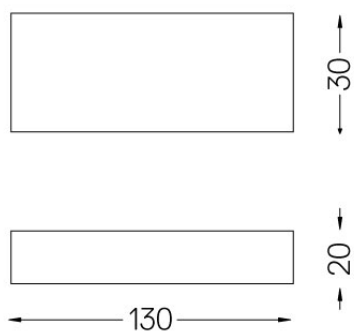

Go IP65 Square

Driver 1-10V [1 luminaire]


59099



Driver 1-10V for Go ø75 [180mA]
230Vac | 50/60Hz | Class II

Weight
0,07Kg


Finishes
.99

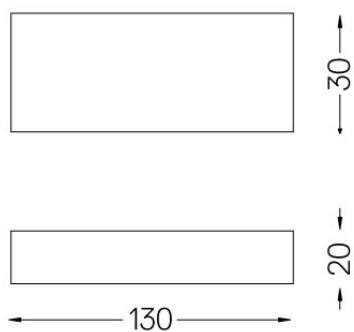

Go IP65 Square

Driver 1-10V [1 luminaire]

59098



Driver 1-10V for Go ø75 [120mA]
230Vac | 50/60Hz | Class II

Weight
0,07Kg

Finishes
.99