

5,6W / 215lm / 4000K / On/Off / Spot 16° /  
ø45mm

64890



Design: O/M + Bartenbach GmbH  
Surface spotlight with die-cast aluminium body with electrostatic 100% polyester paint finish.  
Spot-lens with individual complex surface ribs to provide a focal light and an extremely narrow beam.  
Orientable by 150° horizontal rotation and 330° vertical rotation.  
Driver to be ordered separately.

LED CRI>90 / >50.000h, L80/B10  
2-step MacAdam / Driver to be ordered separately.  
IP20 / 450mA




| LED                 | 4000K | Light Source | Luminaire      |
|---------------------|-------|--------------|----------------|
| Power               |       | 5,6W         | 5,6W           |
| Flux                |       | 480lm        | 215lm          |
| Efficiency          |       | 86lm/W       | 31lm/W         |
| LOR                 |       | -            | 45%            |
| Operating Condition |       | -            | Current Source |



Beam angle  
Spot 16°

Application

Weight  
0,30Kg

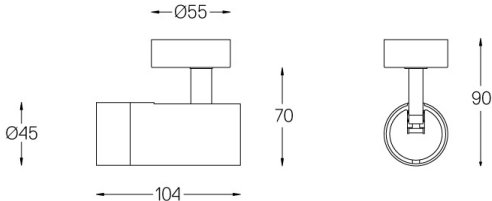

### Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

### Mandatory

- 59084** Driver On/Off [Up to 2 luminaires]  
140x30x21mm
- 59085** Driver On/Off [Up to 3 luminaires]  
163x30x21mm
- 59086** Driver DALI [Up to 2 luminaires]  
140x30x21mm
- 59087** Driver DALI [Up to 3 luminaires]  
163x30x21mm

### Optional

- 59072** 1/4 CTO  
ø35x1,1mm
- 59073** 1/2 CTO  
ø35x1,1mm
- 59074** Louvre  
ø35x2mm
- 59075** Soft diffuser  
ø35x2mm