

5,6W / 370lm / 4000K / On/Off / Medium
40° / ø45mm


64891




Design: O/M + Bartenbach GmbH
Surface spotlight with die-cast aluminium body with electrostatic 100% polyester paint finish.
Orientable by 150° horizontal rotation and 330° vertical rotation.
Driver to be ordered separately.

LED CRI>90 / >50.000h, L80/B10
2-step MacAdam / Driver to be ordered separately.
IP20 / 450mA




| | | |
|--|---------------------|-----------------------|
|  4000K | Light Source | Luminaire |
| Power | 5,6W | 5,6W |
| Flux | 460lm | 370lm |
| Efficiency | 82lm/W | 53lm/W |
| LOR | - | 80% |
| Operating Condition | - | Current source |

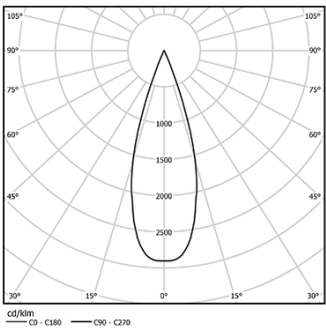

Beam angle
Medium 40°

Application

Weight
0,30Kg

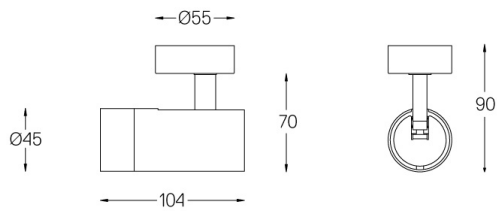

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Mandatory

59084 Driver On/Off [Up to 2 luminaires]

140x30x21mm

59085 Driver On/Off [Up to 3 luminaires]

163x30x21mm

59086 Driver DALI [Up to 2 luminaires]

140x30x21mm

59087 Driver DALI [Up to 3 luminaires]

163x30x21mm

Optional

59072 1/4 CTO

$\varnothing 35 \times 1,1\text{mm}$

59073 1/2 CTO

$\varnothing 35 \times 1,1\text{mm}$

59074 Louvre

$\varnothing 35 \times 2\text{mm}$

59075 Soft diffuser

$\varnothing 35 \times 2\text{mm}$

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class G Model Identifier 4053560313L