




Design: O/M + Bartenbach GmbH
Ceiling-recessed luminaire with aluminium die-cast body with electrostatic 100% polyester paint finish. Focal lens with complex surfaces to provide a focal point through an 8mm aperture for low glare illumination.
Driver to be ordered separately.

LED CRI>90 / >50.000h, L80/B10
2-step MacAdam
IP65



| | | | |
|---|--------|--------------|-----------|
|  LED | 2700K | Light Source | Luminaire |
| Power | 2,1W | | 2,1W |
| Flux | 185lm | | 85lm |
| Efficiency | 88lm/W | | 31lm/W |
| LOR | - | | 46% |
| UGR | - | | <10 |




Beam angle
Spot 15°



Weight
0,09Kg

mm

Ø33

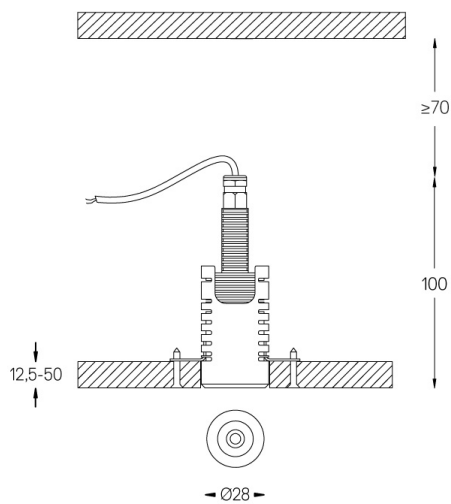

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Mandatory

- 59000** Trimless accessory
ø32x35mm
- 59036** Trim accessory
ø38x75mm
- 59157** Driver On/Off [1 to 5 luminaires]
158x22x19mm
- 59158** Driver DALI [1 to 6 luminaires]
113x24x20mm

Optional

- 59083** Removal tool
- 59001** 1/4 CTO
ø17x1,1mm
- 59002** 1/2 CTO
ø17x1,1mm
- 59003** Louvre
ø17x3mm
- 59004** Soft diffuser
ø17x1mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Drivers On-Off for more than one luminaire and Drivers DALI must be placed remote