



Design: O/M + Bartenbach GmbH

Ceiling-recessed luminaire with aluminium die-cast body with electrostatic 100% polyester paint finish. Focal-lens with complex surfaces to provide a focal point through an 8mm aperture for low glare illumination.

Supplied with fermacell® plasterboard fiber recessing accessory or plasterboard.

Driver to be ordered separately.


LED CRI>90 / >50.000h, L80/B10

2-step MacAdam

IP65



| LED | 4000K | Light Source | Luminaire |
|------------|---------|--------------|-----------|
| Power | 4,2W | 4,2W | 4,2W |
| Flux | 440lm | 440lm | 315lm |
| Efficiency | 105lm/W | 105lm/W | 75lm/W |
| LOR | - | - | 72% |
| UGR | - | - | - |




Beam angle
WallWasher

Application



Weight
0,09Kg

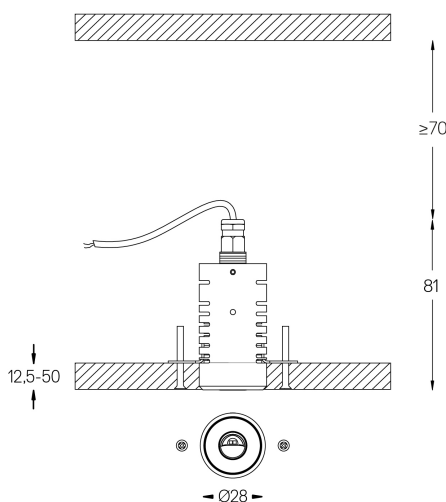

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Mandatory

59000 Trimless accessory

ø32x35mm

59036 Trim accessory

ø38x75mm

59159 Driver On/Off [1 to 2 luminaires]

158x22x19mm

59160 Driver DALI [1 to 3 luminaires]

113x24x20mm

Optional

59013 Ceiling access hatch for drivers

365x365x13mm

59034 Plasterboard metal profile for Nub

250x47x18mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com