




Design: O/M + Bartenbach GmbH  
Ceiling-recessed luminaire with aluminium die-cast body with electrostatic 100% polyester paint finish. Focal-lens with complex surfaces to provide a focal point through an 8mm aperture for low glare illumination.  
Supplied with fermacell® plasterboard fiber recessing accessory or plasterboard.  
Driver to be ordered separately.

LED CRI>90 / >50.000h, L80/B10  
2-step MacAdam  
IP65



LED	4000K	Light Source	Luminaire
Power	4,2W	4,2W	4,2W
Flux	440lm	440lm	315lm
Efficiency	105lm/W	105lm/W	75lm/W
LOR	-	-	72%
UGR	-	-	-




Beam angle  
WallWasher

Application



Weight  
0,09Kg

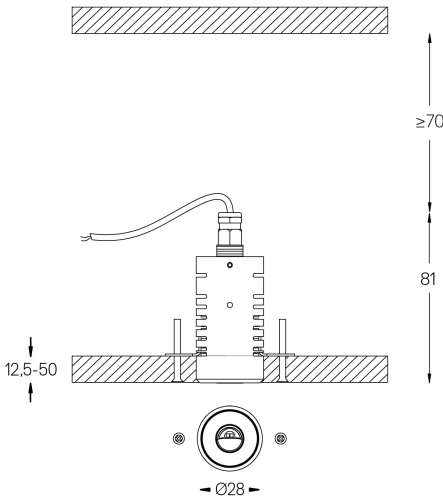

### Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

### Mandatory

- 59000** Trimless accessory  
ø32x35mm
- 59036** Trim accessory  
ø38x75mm
- 59159** Driver On/Off [1 to 2 luminaires]  
158x22x19mm
- 59160** Driver DALI [1 to 3 luminaires]  
113x24x20mm

### Optional

- 59013** Ceiling access hatch for drivers  
365x365x13mm
- 59034** Plasterboard metal profile for Nub  
250x47x18mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: [support@om-light.com](mailto:support@om-light.com)