

2,1W / 165lm / 3000K / On/Off / WallWasher  
/ 31mm

65041

Image not found or type unknown

Design: O/M + Bartenbach GmbH

Luminaire with housing of aluminium profile with electrostatic 100% polyester paint with textured-finish.

Accurate reflector for a defined and controlled beam of light, achieving maximum efficiency.

Special springs available on request.


LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam

Power supply included.

IP20 | 230Vac | 50/60Hz



LED	3000K	Light Source	Luminaire
Power		2,1W	2,7W
Flux		215lm	165lm
Efficiency		102lm/W	61lm/W
LOR		-	77%
UGR		-	-

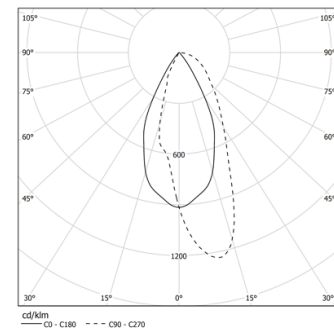

Beam angle  
WallWasher


Application



Weight  
0,15Kg



26x26

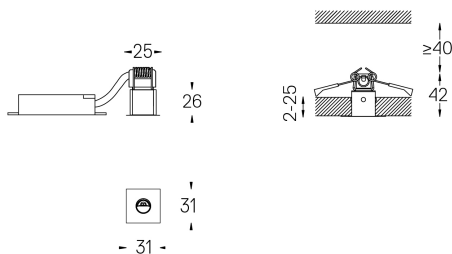

Finishes

○ .01 White / RAL 9010

● .02 Black / RAL 9005

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com