

Image not found or type unknown

Design: O/M + Bartenbach GmbH

Luminaire with housing of aluminium profile with electrostatic 100% polyester paint with textured-finish.

Accurate reflector for a defined and controlled beam of light, achieving maximum efficiency.

Special springs available on request.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam

Power supply included.

IP20 | 230Vac | 50/60Hz



LED	4000K	Light Source	Luminaire
Power		1,1W	1,4W
Flux		120lm	90lm
Efficiency		109lm/W	64lm/W
LOR		-	75%
UGR		-	-




Beam angle
WallWasher

Application



Weight
0,15Kg

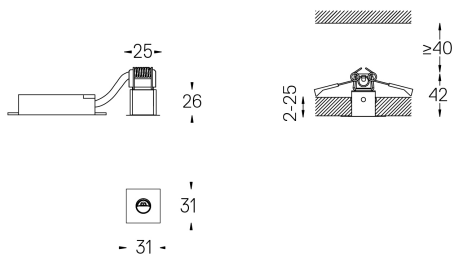

Finishes

○ .01 White / RAL 9010

● .02 Black / RAL 9005

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com