

3,2W / 270lm / 4000K / On/Off / WallWasher
/ 150mm


65088

Design: O/M + Bartenbach GmbH

Luminaire with housing of aluminium profile with electrostatic 100% polyester paint with textured-finish.

Accurate reflector for a defined and controlled beam of light, achieving maximum efficiency.

Special springs available on request.



LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam

Power supply included.

IP20 | 230Vac | 50/60Hz



| LED | 4000K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power | | 3,2W | 4,1W |
| Flux | | 355lm | 270lm |
| Efficiency | | 111lm/W | 66lm/W |
| LOR | | - | 76% |
| UGR | | - | - |




Beam angle
WallWasher

Application



Weight
0,22Kg

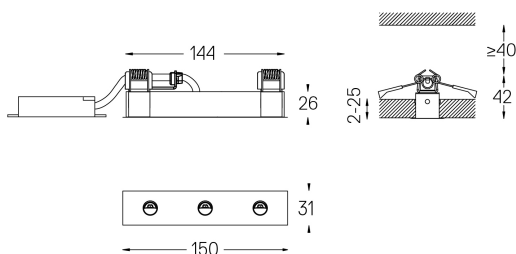

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com