

3,2W / 270lm / 4000K / DALI / WallWasher /  
150mm

65108



Design: O/M + Bartenbach GmbH

Luminaire with housing of aluminium profile with  
electrostatic 100% polyester paint with textured-  
finish.Accurate reflector for a defined and controlled beam  
of light, achieving maximum efficiency.

Special springs available on request.

LED CRI&gt;90 / &gt;50.000h, L80/B10 / 2-step MacAdam

Power supply included.

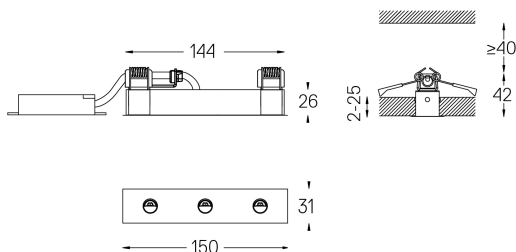
IP20 | 230Vac | 50/60Hz



LED	4000K	Light Source	Luminaire
Power		3,2W	4,1W
Flux		355lm	270lm
Efficiency		111lm/W	66lm/W
LOR		-	76%
UGR		-	-

Beam angle  
WallWasher

Application

Weight  
0,22Kg

Finishes

○ .01 White / RAL 9010

● .02 Black / RAL 9005

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.comThe cutout dimensions are for plasterboard ceilings. For other type of  
material please contact: support@om-light.com