

Design: O/M + Bartenbach GmbH  
Luminaire with housing of aluminium profile with electrostatic 100% polyester paint with textured-finish.  
Accurate reflector for a defined and controlled beam of light, achieving maximum efficiency.  
Special springs available on request.



LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz



| LED        | 2700K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power      |       | 38W          | 44,5W     |
| Flux       |       | 3620lm       | 2750lm    |
| Efficiency |       | 96lm/W       | 62lm/W    |
| LOR        |       | -            | 76%       |
| UGR        |       | -            | -         |




Beam angle  
WallWasher

Application



Weight  
0,55Kg

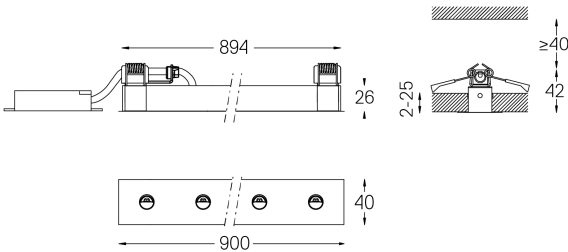

### Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com