

6,3W / 455lm / 2700K / DALI / WallWasher /  
150mm

65153

Design: O/M + Bartenbach GmbH  
Luminaire with housing of aluminium profile with  
electrostatic 100% polyester paint with textured-  
finish.  
Accurate reflector for a defined and controlled beam  
of light, achieving maximum efficiency.  
Special springs available on request.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz



LED	2700K	Light Source	Luminaire
Power		6,3W	7,9W
Flux		600lm	455lm
Efficiency		95lm/W	58lm/W
LOR		-	76%
UGR		-	-




Beam angle  
WallWasher

Application



Weight  
0,22Kg

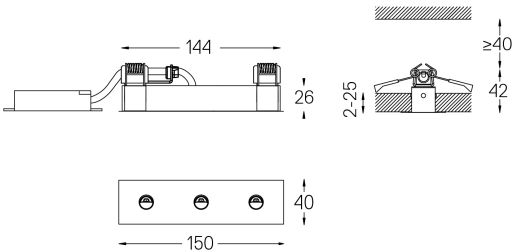

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com  
The cutout dimensions are for plasterboard ceilings. For other type of  
material please contact: support@om-light.com