


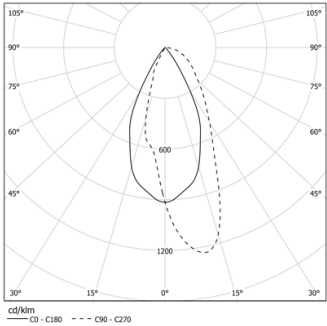
Image not found or type unknown

 3000K	Light Source	Luminaire
Power	2,1W	2,7W
Flux	215lm	165lm
Efficiency	102lm/W	61lm/W
LOR	-	77%
UGR	-	-

Design: O/M + Bartenbach GmbH

Luminaire with housing of aluminium profile with electrostatic 100% polyester paint with textured-finish.
Accurate reflector for a defined and controlled beam of light, achieving maximum efficiency.
Special springs available on request.


LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz



Beam angle
WallWasher



Weight
0,15Kg

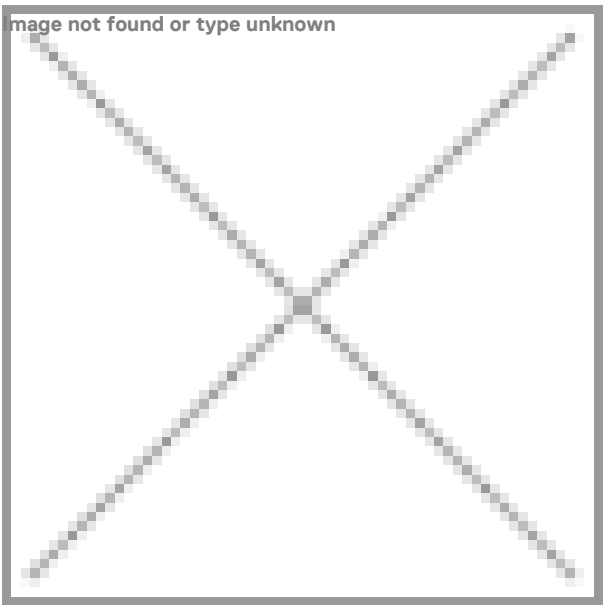

Finishes

- ☐ .01 White / RAL 9010
- ☒ .02 Black / RAL 9005

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com