

19W / 940lm / 4000K / DALI / Spot 17° / 900mm

65250




Design: O/M + Bartenbach GmbH
Luminaire with housing of aluminium profile with electrostatic 100% polyester paint with textured-finish.
Focal-lens with complex surface and individual complex surface rips to provide a focal point through an aperture for glare free area illumination.
Special springs available on request.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz




| LED | 4000K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power | | 19W | 23W |
| Flux | | 2135lm | 940lm |
| Efficiency | | - | - |
| LOR | | - | - |
| UGR | | - | - |



Beam angle
Spot 17°



Weight
0,55Kg

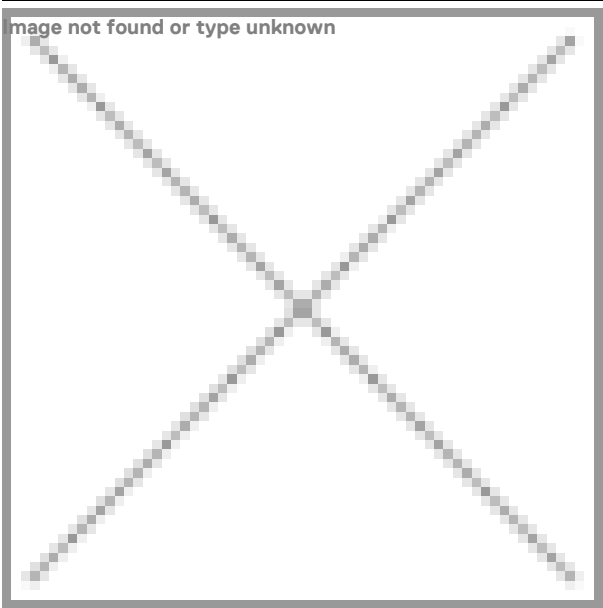

- Finishes
- .01 White / RAL 9010
 - .02 Black / RAL 9005

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com
The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com