

51W / 2325lm / 4000K / On/Off / Spot 17° / 1200mm

65459

Design: O/M + Bartenbach GmbH  
inVision module with housing and perforated cover plate made of aluminium with textured-paint finish.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz




- Structure**

  - 1 Profile
  - 2 End caps
  - 3 Fitting accessories
  - 4 Profile coupling
- Modules**

  - A inVision Module

LED	4000K	Light Source	Luminaire
Power		51W	59,3W
Flux		5280lm	2325lm
Efficiency		105lm/W	39lm/W
LOR		-	44%
UGR		-	<10

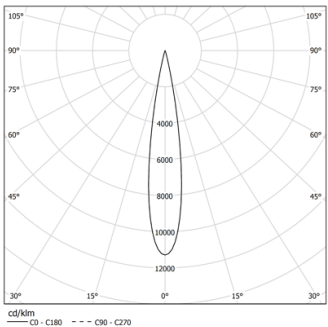


Beam angle  
Spot 17°

Application



Weight  
0,8Kg

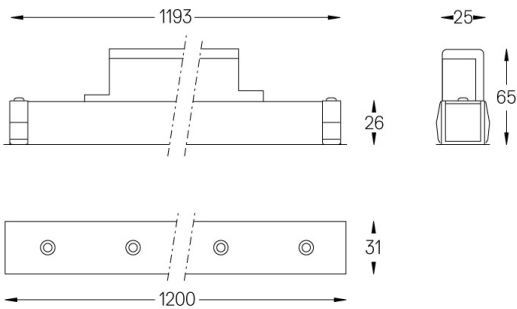

- Finishes**
- .01 White / RAL 9010
  - .02 Black / RAL 9005

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: [support@om-light.com](mailto:support@om-light.com)