

38W / 1740lm / 4000K / DALI / Spot 17° /  
 900mm

65467

**Structure**

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

**Modules**


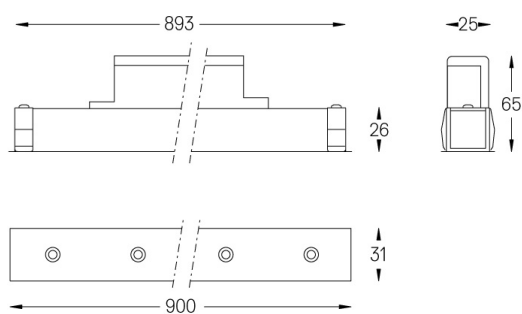
- A inVision Module

Design: O/M + Bartenbach GmbH

 inVision module with housing and perforated cover  
 plate made of aluminium with textured-paint finish.

 LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
 Power supply included.  
 IP20 | 230Vac | 50/60Hz


LED	4000K	Light Source	Luminaire
Power		38W	44,5W
Flux		3960lm	1740lm
Efficiency		105lm/W	39lm/W
LOR		-	44%
UGR		-	<10


 Beam angle  
**Spot 17°**
**Application**
 Weight  
**0,6Kg**
**Finishes**

- .01 White / RAL 9010
- .02 Black / RAL 9005

 For the specific supply of "DALI 2" drivers, please contact:  
[support@om-light.com](mailto:support@om-light.com)

 Choose the length and layout of the system exactly as you want it, to  
 model the right lighting functions for different tasks. For further  
 information please contact: [support@om-light.com](mailto:support@om-light.com)