



Design: O/M + Bartenbach GmbH  
Module with double focus lens and housing and perforated cover plate made of aluminium with textured-paint finish.  
Available in white (.01) and black (.02)

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP20 | 48Vdc




| LED        | 2700K  | Light Source | Luminaire |
|------------|--------|--------------|-----------|
| Power      | 14W    |              | 17,1W     |
| Flux       | 1200lm |              | 910lm     |
| Efficiency | 86lm/W |              | 53lm/W    |
| LOR        | -      |              | 76%       |
| UGR        | -      |              | <16       |



Beam angle  
Flood 50°

Application

Weight  
-

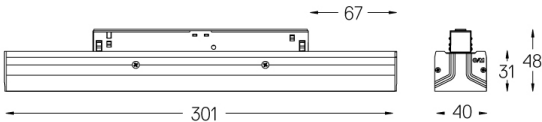

Finishes

○ .01 White / RAL 9010  
● .02 Black / RAL 9005

Optional  
70045 Modules removal tool  
20x75mm

Data according to regulations  
2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains light sources of efficiency class F  
Model Identifier 4053560342H