

28W / 1960lm / 3000K / DALI / Flood 50° /
1201mm

73062



Design: O/M + Bartenbach GmbH
Module with double focus lens and housing and
perforated cover plate made of aluminium with
textured-paint finish.
Available in white (.01) and black (.02)

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam
Power supply included.
IP20 | 48Vdc



| LED | 3000K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power | | 28W | 34,1W |
| Flux | | 2580lm | 1960lm |
| Efficiency | | 92lm/W | 57lm/W |
| LOR | | - | 76% |
| UGR | | - | <13 |




Beam angle
Flood 50°

Application



Weight
-

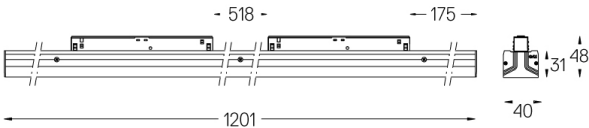

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Optional

70045 Modules removal tool
20x75mm

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains light sources of efficiency class E
Model Identifier 4053560343L