

56W / 5160lm / 4000K / DALI / Flood 50° /
1201mm

73095

Design: O/M + Bartenbach GmbH
Module with double focus lens and housing and
perforated cover plate made of aluminium with
textured-paint finish.
Available in white (.01) and black (.02)

LED CRI>80 / >50.000h, L80/B10 / 2-step MacAdam
Power supply included.
IP20 | 48Vdc




| LED | 4000K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power | | 56W | 65,9W |
| Flux | | 6800lm | 5160lm |
| Efficiency | | 121lm/W | 78lm/W |
| LOR | | - | 76% |
| UGR | | - | <16 |



Beam angle
Flood 50°

Application

Weight
-

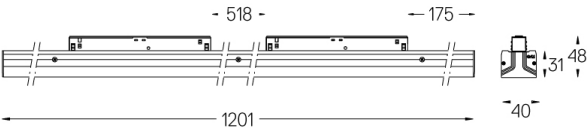

Finishes

○ .01 White / RAL 9010
● .02 Black / RAL 9005

Optional
70045 Modules removal tool
20x75mm

Data according to regulations
2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains light sources of efficiency class D
Model Identifier 4053560345H