

56W / 5160lm / 4000K / DALI / Flood 50° /  
1201mm

73095

Design: O/M + Bartenbach GmbH  
Module with double focus lens and housing and  
perforated cover plate made of aluminium with  
textured-paint finish.  
Available in white (.01) and black (.02)

LED CRI>80 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP20 | 48Vdc




LED	4000K	Light Source	Luminaire
Power		56W	65,9W
Flux		6800lm	5160lm
Efficiency		121lm/W	78lm/W
LOR		-	76%
UGR		-	<16



Beam angle  
Flood 50°

Application

Weight  
-

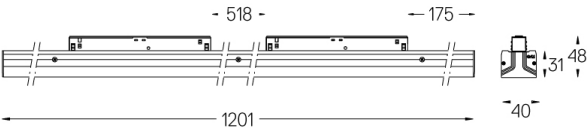

- Finishes
- .01 White / RAL 9010
  - .02 Black / RAL 9005

Optional  
**70045** Modules removal tool  
20x75mm

Data according to regulations  
2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains light sources of efficiency class D  
Model Identifier 4053560345H