

Design: O/M + Bartenbach GmbH  
Module with LED light source and asymmetrical  
aluminium reflector.  
Available in white (.01) and black (.02)

LED CRI>90 / >50.000h, L80/B10  
2-step MacAdam / power supply included.  
IP20 | 48Vdc



LED	3000K	Light Source	Luminaire
Power		23W	28W
Flux		2400lm	1110lm
Efficiency		104lm/W	40lm/W
LOR		-	46%
UGR		-	-




Beam angle  
Wallwasher

Application



Weight  
-

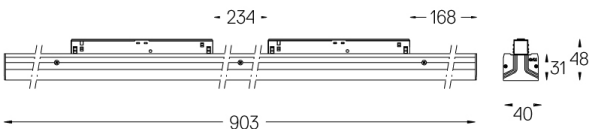

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Optional

70045 Modules removal tool  
20x75mm

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class F  
Model Identifier 2053560180