

3,3W / 340lm / 3000K / DALI / Flood 65° /  
329mm

75016

Module with linear extruded lenses (Lightstream)  
combined with a secondary reflector, integrated into  
an extruded aluminium profile.  
Available in white (.04) and black (.05)

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP20 | 48Vdc




LED	3000K	Light Source	Luminaire
Power		3,3W	4,2W
Flux		420lm	340lm
Efficiency		127lm/W	81lm/W
LOR		-	81%
UGR		-	<13



Beam angle  
Flood 65°

Application

Weight  
-

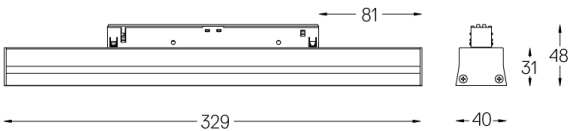

- Finishes
- .04 Matt White
  - .05 Matt Black

Optional  
70045 Modules removal tool  
20x75mm

Data according to regulations  
2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class E  
Model Identifier 2053560160L