

3,3W / 340lm / 3000K / DALI / Wide flood  
80° / 329mm

75018

Module with linear extruded lenses (Lightstream) combined with a secondary reflector, integrated into an extruded aluminium profile.  
Available in white (.04) and black (.05)

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP20 | 48Vdc



3000K	Light Source	Luminaire
Power	3,3W	4,2W
Flux	420lm	340lm
Efficiency	127lm/W	81lm/W
LOR	-	81%
UGR	-	<19




Beam angle  
Wide flood 80°

Application



Weight  
-

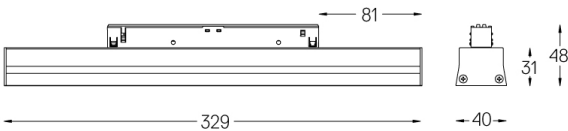

Finishes

- ☐ .04 Matt White
- ☒ .05 Matt Black

Optional

70045 Modules removal tool  
20x75mm

Data according to regulations  
2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class E  
Model Identifier 2053560160L