

3,3W / 340lm / 3000K / DALI / Wide flood
80° / 329mm


75018

Module with linear extruded lenses (Lightstream) combined with a secondary reflector, integrated into an extruded aluminium profile.
Available in white (.04) and black (.05)


LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam
Power supply included.
IP20 | 48Vdc




| LED | 3000K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power | | 3,3W | 4,2W |
| Flux | | 420lm | 340lm |
| Efficiency | | 127lm/W | 81lm/W |
| LOR | | - | 81% |
| UGR | | - | <19 |



Beam angle
Wide flood 80°



Weight
-

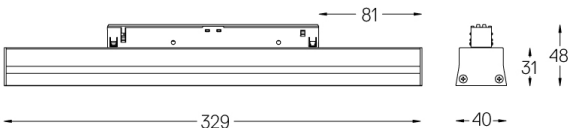

Finishes

- .04 Matt White
- .05 Matt Black

Optional

70045 Modules removal tool
20x75mm

Data according to regulations
2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class E
Model Identifier 2053560160L