


Module with linear extruded lenses (Lightstream) combined with a secondary reflector, integrated into an extruded aluminium profile.  
Available in white (.04) and black (.05)

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP20 | 48Vdc




3000K	Light Source	Luminaire
Power	6,6W	8,3W
Flux	840lm	680lm
Efficiency	127lm/W	82lm/W
LOR	-	81%
UGR	-	<13



Beam angle  
Flood 65°

Application

Weight  
-

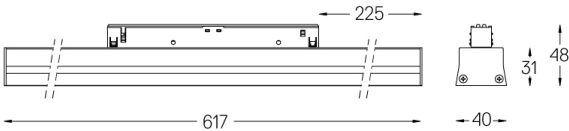

- Finishes
- ☐

.04 Matt White
- ☒

.05 Matt Black

Optional  
70045 Modules removal tool  
20x75mm

Data according to regulations  
2019/2020/EU supplemented by 2021/341 |2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class E  
Model Identifier 2053560160L