


Module with linear extruded lenses (Lightstream) combined with a secondary reflector, integrated into an extruded aluminium profile.  
Available in white (.04) and black (.05)

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP20 | 48Vdc



| LED        | 3000K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power      |       | 6,6W         | 8,3W      |
| Flux       |       | 840lm        | 680lm     |
| Efficiency |       | 127lm/W      | 82lm/W    |
| LOR        |       | -            | 81%       |
| UGR        |       | -            | <13       |




Beam angle

Flood 65°

Application

Weight

-

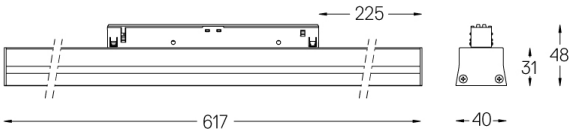

- Finishes
- .04 Matt White

● .05 Matt Black

Optional  
70045 Modules removal tool  
20x75mm

Data according to regulations  
2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class E  
Model Identifier 2053560160L