

Module with linear extruded lenses (Lightstream) combined with a secondary reflector, integrated into an extruded aluminium profile.
Available in white (.04) and black (.05)

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam
Power supply included.
IP20 | 48Vdc



| LED | 4000K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power | | 3,3W | 4,2W |
| Flux | | 450lm | 360lm |
| Efficiency | | 136lm/W | 86lm/W |
| LOR | | - | 80% |
| UGR | | - | <13 |




Beam angle

Flood 65°

Application

Weight

-

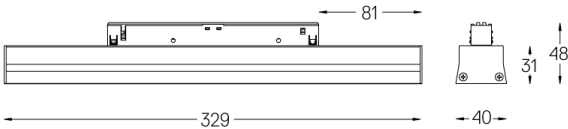

- Finishes
- ☐

.04 Matt White
- ☒

.05 Matt Black

Optional
70045 Modules removal tool
20x75mm

Data according to regulations
2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class D
Model Identifier 4053560084L