



Design: Eduardo Souto de Moura

Indirect light wall lamp with a direct narrow light beam.

Aluminium body with electrostatic 100% polyester paint with textured-finish suitable for adverse climate conditions.

Anti-reflective acrylic diffuser.

LED CRI>90 / >50.000h, L80/B10
3-step MacAdam / power supply included.
IP22 | 230Vac | 50/60Hz



| LED | 3000K | Light Source | Luminaire |
|------------|---------|--------------|-----------|
| Power | 13W | | 15,3W |
| Flux | 1330lm | | 930lm |
| Efficiency | 102lm/W | | 61lm/W |
| LOR | - | | 70% |
| UGR | - | | - |




Beam angle
Diffuse

Application



Weight
0,97Kg

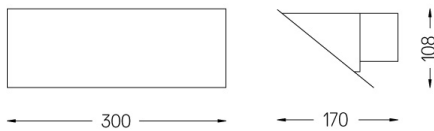

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005
- .03 Grey / RAL 9006

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com