


51W / 4100lm / 3000K / DALI / Diffuse /  
1127mm

44126

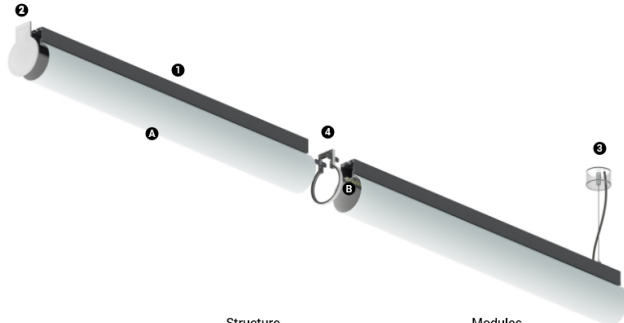

#### Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

#### Modules

- A Polycarbonate Diffuser
- LED Light Sources
- B See multiple options


Design: O/M

LED light source with good colour consistency and long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz



LED	3000K	Light Source	Luminaire
Power	51W	60W	
Flux	5850lm	4100lm	
Efficiency	115lm/W	68lm/W	
LOR	-	70%	
UGR	-	<22	



Beam angle  
Diffuse

Application



Weight  
2,3Kg

mm

Finishes

