


63W / 5100lm / 3000K / On/Off / Diffuse /  
1409mm

44135

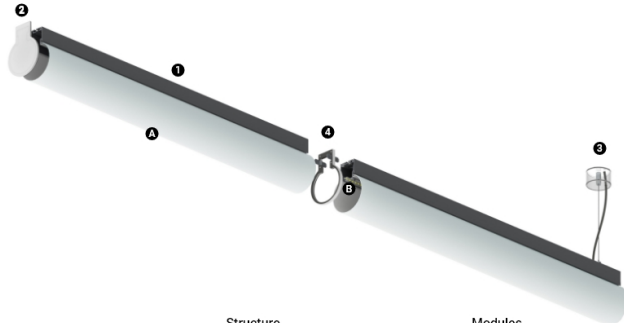

#### Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

#### Modules

A Polycarbonate Diffuser

#### LED Light Sources

B See multiple options

Design: O/M

LED light source with good colour consistency and long operation lifespan.


LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam

Power supply included.

IP20 | 230Vac | 50/60Hz



LED	3000K	Light Source	Luminaire
Power		63W	74,1W
Flux		7300lm	5100lm
Efficiency		116lm/W	69lm/W
LOR		-	70%
UGR		-	<22



Beam angle  
Diffuse

Application



Weight  
2,3Kg

mm

Finishes

