


26W / 2000lm / 3000K / DALI / Diffuse /
563mm

44146

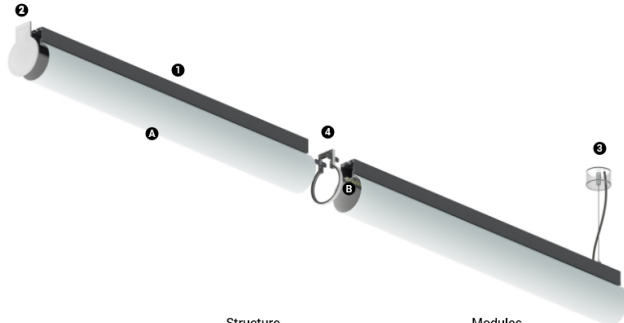

Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

Modules

- A Polycarbonate Diffuser
- LED Light Sources
- B See multiple options


Design: O/M

LED light source with good colour consistency and long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz



LED	3000K	Light Source	Luminaire
Power		26W	31,7W
Flux		2900lm	2000lm
Efficiency		112lm/W	63lm/W
LOR		-	69%
UGR		-	<22



Beam angle
Diffuse

Application



Weight
0,95Kg

mm

Finishes

