


38W / 3300lm / 4000K / On/Off / Diffuse /
845mm

44159

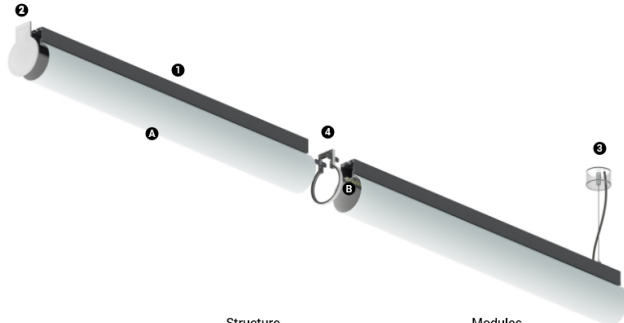

Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

Modules

A Polycarbonate Diffuser

LED Light Sources

B See multiple options

Design: O/M

LED light source with good colour consistency and long operation lifespan.


LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam

Power supply included.

IP20 | 230Vac | 50/60Hz



LED	4000K	Light Source	Luminaire
Power		38W	44,7W
Flux		4750lm	3300lm
Efficiency		125lm/W	74lm/W
LOR		-	69%
UGR		-	<22

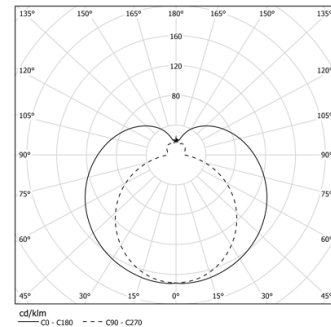

Beam angle
Diffuse

Application



Weight
0,95Kg

mm

Finishes

