

Nub Flush

5,6W / 260lm / 4000K / Medium 35° / 8mm

60016

Design: O/M + Bartenbach GmbH

Ceiling-recessed luminaire with aluminium die-cast body with electrostatic 100% polyester paint finish. Focal-lens with complex surfaces to provide a focal point through an 8mm aperture for low glare illumination.

Supplied with fermacell® plasterboard fiber recessing accessory or plasterboard.

Driver to be ordered separately.


LED CRI>90 / >50.000h, L80/B10

2-step MacAdam

IP65



LED	4000K	Light Source	Luminaire
Power	5,6W	5,6W	5,6W
Flux	490lm	260lm	260lm
Efficiency	88lm/W	46lm/W	46lm/W
LOR	-	53%	53%
UGR	-	<19	<19



Beam angle
Medium 35°


Application



Weight
0,96Kg



201x201

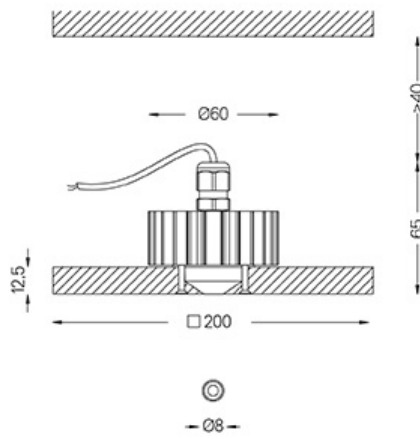

Finishes

- .02 Black / RAL 9005

Mandatory

- 59009** Driver On/Off [1 to 3 luminaire]
146,5x43,5x30mm
- 59010** Driver On/Off [3 to 6 luminaires]
115,5x76x30mm
- 59011** Driver DALI [1 luminaire]
95x53x30mm
- 59012** Driver DALI [up to 4 luminaires]
124x78x22mm

Optional

- 59013** Ceiling access hatch for drivers
365x365x13mm
- 59034** Plasterboard metal profile for Nub
250x47x18mm

Optional (positioned at the factory)

- 59001** 1/4 CTO
ø17x1mm
- 59002** 1/2 CTO
ø17x1mm
- 59003** Louvre
ø17x3mm
- 59004** Soft diffuser
ø17x1mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains a light source of efficiency class G
Model Identifier 4053560146