

## Nub Flush

5,6W / 290lm / 4000K / On/Off / Flood 58° /  
8mm

60017

Design: O/M + Bartenbach GmbH

Ceiling-recessed luminaire with aluminium die-cast body with electrostatic 100% polyester paint finish. Focal-lens with complex surfaces to provide a focal point through an 8mm aperture for low glare illumination.


Supplied with Plasterboard.

Driver to be ordered separately.

LED CRI>90 / >50.000h, L80/B10  
2-step MacAdam  
IP65



LED	4000K	Light Source	Luminaire
Power		5,6W	5,6W
Flux		490lm	290lm
Efficiency		88lm/W	52lm/W
LOR		-	59%
UGR		-	<28

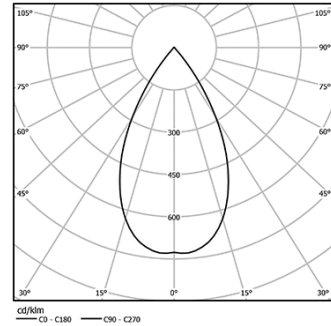

Beam angle  
Flood 58°


Application



Weight  
0,96Kg



201x201

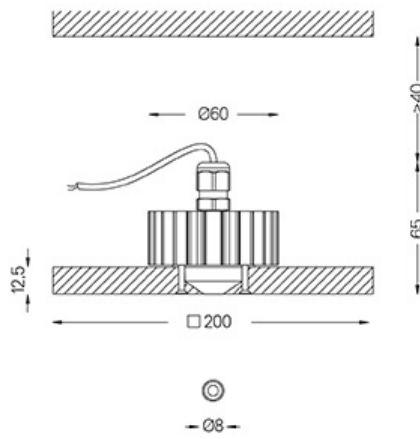

Finishes

● .02 Black / RAL 9005

Mandatory

**59009** Driver On/Off [1 to 3 luminaire]

146,5x43,5x30mm

**59010** Driver On/Off [3 to 6 luminaires]

115,5x76x30mm

**59011** Driver DALI [1 luminaire]

95x53x30mm

**59012** Driver DALI [up to 4 luminaires]

124x78x22mm

Optional

**59013** Ceiling access hatch for drivers

365x365x13mm

**59034** Plasterboard metal profile for Nub

250x47x18mm

Optional (positioned at the factory)

**59001** 1/4 CTO

Ø17x1mm

**59002** 1/2 CTO

Ø17x1mm

**59003** Louvre

Ø17x3mm

**59004** Soft diffuser

Ø17x1mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: [support@om-light.com](mailto:support@om-light.com)

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU

supplemented by 2021/340/EU Energy Consumption Labelling

Ordinance. This product contains a light source of efficiency class G

Model Identifier 4053560146



## Nub Flush

Driver On/Off [1 to 3  
luminaires]

59009



Driver On/Off for Nub  
(Plasterboard versions) [1 to 3  
luminaire]  
230Vac | 50/60Hz | Class II

Weight  
0,122Kg

Finishes  
.99





## Nub Flush

Driver On/Off [3 to 6  
luminaires]


59010



Driver On/Off for Nub  
(Plasterboard versions) [3 to 6  
luminaire]  
230Vac | 50/60Hz | Class I

Weight  
0,18Kg

Finishes  
.99

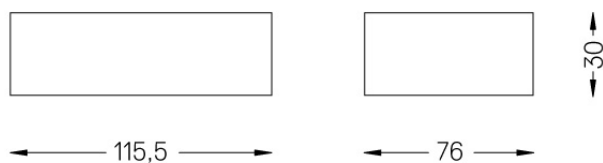

## Nub Flush

Driver DALI [1 luminaire]


59011



Driver DALI for Nub (Plasterboard versions) [1 luminaire]  
230Vac | 50/60Hz | Class II

Weight  
0,1Kg

Finishes  
.99

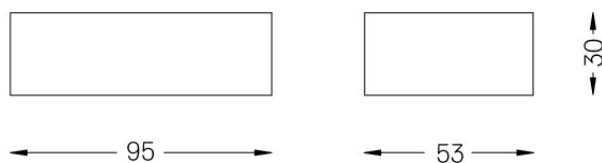



## Nub Flush

Driver DALI [4 luminaires]


59012



Driver DALI for Nub (Plasterboard versions) [up to 4 luminaires]  
230Vac | 50/60Hz | Class II

Weight  
0,137Kg


Finishes  
.99

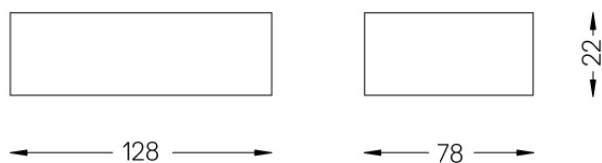


## Nub Flush

1/4 CTO

59001



Positioned at the factory  
Dichroic Filter Glass  
1/4 CTO for Nub.  
Positioned at the factory for Nub  
with Plasterboard versions

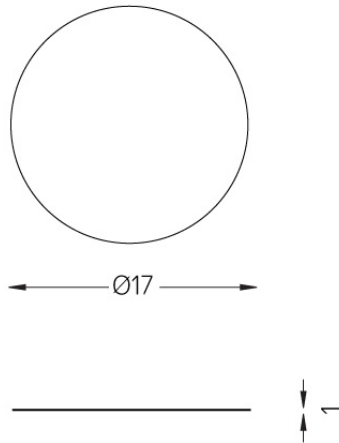


Weight  
0,01Kg

Finishes  
.99


## Nub Flush

1/2 CTO

59002



Positioned at the factory  
Dichroic Filter Glass  
1/2 CTO for Nub.  
Positioned at the factory for Nub  
with Plasterboard versions.



Ø17



Weight  
0,01Kg


Finishes  
.99



## Nub Flush

Louvre


59003



Positioned at the factory

Louvre for Nub.

Positioned at the factory for Nub  
with Plasterboard versions



Ø41



3

Weight  
0,01Kg


Finishes  
.99



## Nub Flush

Soft diffuser


59004



Positioned at the factory  
Soft diffuser for Nub.  
Positioned at the factory for Nub  
with Plasterboard versions.

Weight  
0,01Kg



Finishes  
.99

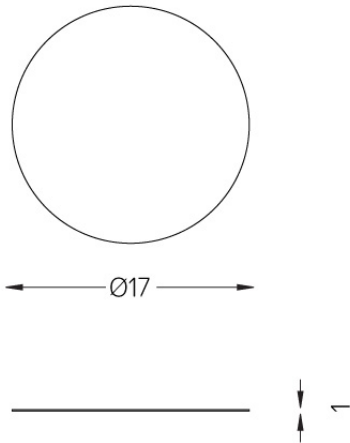

## Nub Flush

Ceiling access hatch for  
drivers

59013

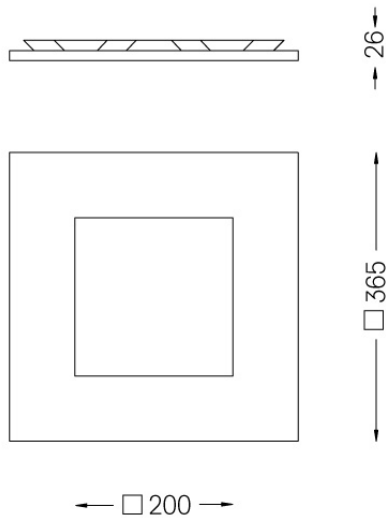

Ceiling access hatch for drivers

Weight  
1,62Kg

Finishes  
.99

## Nub Flush

Plasterboard metal profile  
for Nub 250x47x18 mm

59034



Plasterboard metal profile for Nub  
250x47x18 mm

Weight  
0,5Kg

Finishes  
.99

