


Design: O/M + Bartenbach GmbH

Luminaire with housing of aluminium profile with electrostatic 100% polyester paint with textured-finish.


Focal-lens with complex surface and individual complex surface rips to provide a focal point through an aperture for glare free area illumination.

Special springs available on request.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
Power supply included. DALI DT8
IP20 | 230Vac | 50/60Hz

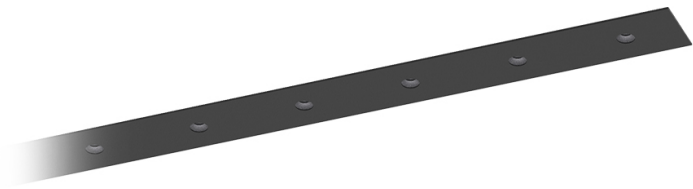


LED	2200K-5000K	Light Source	Luminaire
Power	46W*	46W*	54,1W*
Flux	3760lm*	3760lm*	2720lm*
Efficiency	82lm/W	82lm/W	50lm/W
LOR	-	-	72%
UGR	-	-	<10



Beam angle
Medium 31°

Application



Weight
0,6Kg



26x1194

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

