

9,8W / 790lm / 4000K / On/Off / Spot 15° /
ø85mm

60163



Design: O/M + Bartenbach GmbH
 Ceiling-recessed luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.
 Spot-lens with individual complex surface rips to provide a focal light and an extremely narrow beam.
 Fitting accessories for different applications are available.

LED CRI>80 / >50.000h, L80/B10
 2-step MacAdam / Power supply included.
 IP20 | 230Vac | 50/60Hz



LED 4000K

Light Source Luminaire


Power 9,8W 12,3W

Flux 1360lm 790lm

Efficiency 139lm/W 64lm/W

LOR - 58%

UGR - <10

Beam angle
Spot 15°Weight
0,58Kg

mm

Ø 078 (trim version)

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Optional


59014 Accessory 12,5mm ceilings (flush installation)

150x91x20mm

59038 Accessory 10-40mm ceilings (acoustic ceiling)

156x100x78mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

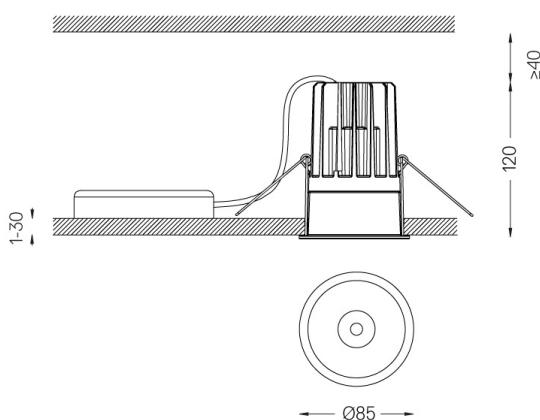

Data according to regulations
 2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
 supplemented by 2021/340/EU Energy Consumption Labelling
 Ordinance. This product contains a light source of efficiency class F
 Model Identifier 2053560247H