




Design: O/M + Bartenbach GmbH
 Ceiling-recessed luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.
 Lightcore optics for defined and perfectly controlled beam of light.
 Easy recessing system with spring clips.
 Fitting accessories for different applications are available.

LED CRI>80 / >50.000h, L80/B10
 2-step MacAdam / Power supply included.
 IP20 | 230Vac | 50/60Hz



	4000K	Light Source	Luminaire
Power	9,8W	12,3W	
Flux	1360lm	1220lm	
Efficiency	139lm/W	100lm/W	
LOR	-	90%	
UGR	-	<19	



Beam angle
Flood 56°




Weight
0,53Kg

mm

Ø 078 (trim version)

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

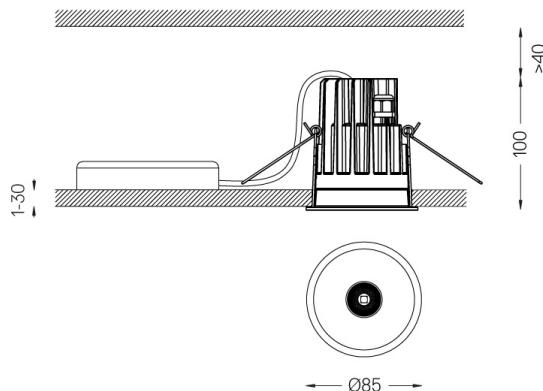

Optional

- 59014 Accessory 12,5mm ceilings (flush installation)
150x91x20mm
- 59038 Accessory 10-40mm ceilings (acoustic ceiling)
156x100x78mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
 supplemented by 2021/340/EU Energy Consumption Labelling
 Ordinance. This product contains a light source of efficiency class F
 Model Identifier 2053560247H