

4,5W / 560lm / 4000K / DALI / Flood 56° /
ø85mm

60174




Design: O/M + Bartenbach GmbH
 Ceiling-recessed luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.
 Lightcore optics for defined and perfectly controlled beam of light.
 Easy recessing system with spring clips.
 Fitting accessories for different applications are available.

LED CRI>80 / >50.000h, L80/B10
 2-step MacAdam / Power supply included.
 IP20 | 230Vac | 50/60Hz



	4000K	Light Source	Luminaire
Power	4,5W	5,8W	
Flux	620lm	560lm	
Efficiency	138lm/W	97lm/W	
LOR	-	90%	
UGR	-	<16	



Beam angle
Flood 56°




Weight
0,53Kg

mm

Ø 078 (trim version)

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

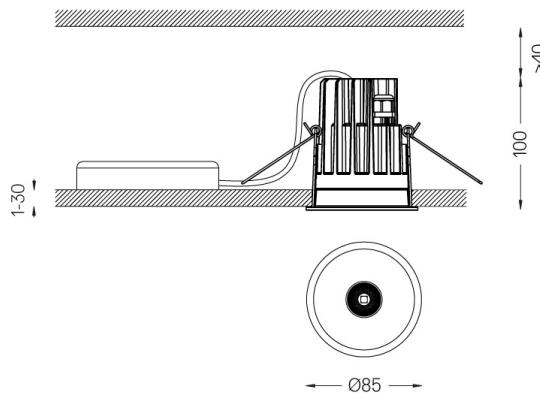

Optional

59014 Accessory 12,5mm ceilings (flush installation)

150x91x20mm

59038 Accessory 10-40mm ceilings (acoustic ceiling)

156x100x78mm

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU

supplemented by 2021/340/EU Energy Consumption Labelling

Ordinance. This product contains a light source of efficiency class E

Model Identifier 2053560247L