

4,5W / 400lm / 4000K / DALI / Medium 40° /
ø85mm

60224




Design: O/M + Bartenbach GmbH
Ceiling-recessed luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.
Lightcore optics for defined and perfectly controlled beam of light.
Easy recessing system with spring clips.
Fitting accessories for different applications are available.

LED CRI>80 / >50.000h, L80/B10
2-step MacAdam / Power supply included.
IP65 | 230Vac | 50/60Hz



	4000K	Light Source	Luminaire
Power	4,5W	5,8W	
Flux	620lm	400lm	
Efficiency	138lm/W	69lm/W	
LOR	-	65%	
UGR	-	<10	



Beam angle
Medium 40°



Weight
0,53Kg

mm

Ø78 (trim version)

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Optional

59014 Accessory 12,5mm ceilings (flush installation)

150x91x20mm

59038 Accessory 10-40mm ceilings (acoustic ceiling)

156x100x78mm

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com


Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU

supplemented by 2021/340/EU Energy Consumption Labelling

Ordinance. This product contains a light source of efficiency class E

Model Identifier 2053560247L

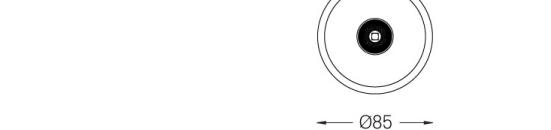

— Ø85 —