

4,5W / 460lm / 4000K / DALI / Medium 40° /  
ø95mm

60240



Design: O/M + Bartenbach GmbH  
 Ceiling-recessed luminaire with die-cast aluminium body and heat sink.  
 Orientable by 30° on the horizontal axis and 355° on the vertical axis.  
 Reflector built based on micro surfaces with complex geometry coated with aluminium alloy, creating a high-gloss, entirely mirrored surface. Accurate reflector for a defined and controlled beam of light, achieving the maximum efficiency.  
 Reduced height <67mm.  
 Recessing accessory for trimless version supplied separately.

LED CRI>80 / >50.000h, L80/B10  
 2-step MacAdam / Power supply included.  
 IP20 | 230Vac | 50/60Hz



**4000K**

**Light Source**

**Luminaire**


**Power** **4,5W** **5,8W**

**Flux** **620lm** **460lm**

**Efficiency** **138lm/W** **80lm/W**

**LOR** **-** **74%**

**UGR** **-** **<10**



**Beam angle**  
**Medium 40°**




**Weight**  
**0,42Kg**

**mm**

Ø90 (trim version)

**Finishes**

- .01 White / RAL 9010**
- .02 Black / RAL 9005**
- .21 Black+White**

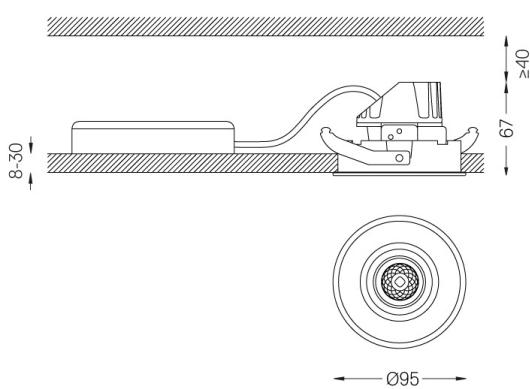

**Optional**  
**59015 Accessory 12,5mm ceilings (flush installation)**  
 150x101x20mm

For the specific supply of "DALI 2" drivers, please contact:  
[support@om-light.com](mailto:support@om-light.com)

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: [support@om-light.com](mailto:support@om-light.com)

**Data according to regulations**  
 2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
 supplemented by 2021/340/EU Energy Consumption Labelling  
 Ordinance. This product contains a light source of efficiency class E  
 Model Identifier 2053560247L