

9,8W / 770lm / 3000K / DALI / Medium 41° / ø85mm

60257



Design: O/M + Bartenbach GmbH

Surface spotlight with die-cast aluminium body with electrostatic 100% polyester paint finish.


Spot-lens with individual complex surface rips to provide a focal light and an extremely narrow beam. Orientable by 90° horizontal rotation and 330° vertical rotation.

Driver included.

LED CRI>90 / >50.000h, L80/B10  
2-step MacAdam / Power supply included.  
IP20 | 230Vac | 50/60Hz




LED	3000K	Light Source	Luminaire
Power		9,8W	12,3W
Flux		1035lm	770lm
Efficiency		106lm/W	63lm/W
LOR		-	74%
Operating Condition		-	230Vac



Beam angle  
**Medium 41°**

Application

Weight  
**0,64Kg**

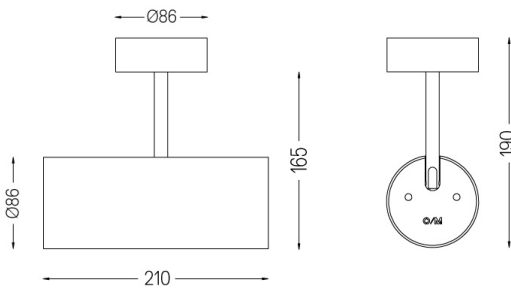

### Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

### Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class F  
Model Identifier 2053560257H