

9,8W / 1220lm / 4000K / DALI / Flood 59° / ø85mm

60267



Design: O/M + Bartenbach GmbH

Surface spotlight with die-cast aluminium body with electrostatic 100% polyester paint finish.


Spot-lens with individual complex surface rips to provide a focal light and an extremely narrow beam. Orientable by 90° horizontal rotation and 330° vertical rotation.

Driver included.

LED CRI>90 / >50.000h, L80/B10
2-step MacAdam / Driver included.
IP20 | 230Vac | 50/60Hz



| LED | 4000K | Light Source | Luminaire |
|---------------------|-------|--------------|-----------|
| Power | | 9,8W | 12,3W |
| Flux | | 1360lm | 1220lm |
| Efficiency | | 139lm/W | 100lm/W |
| LOR | | - | 90% |
| Operating Condition | | - | 230Vac |

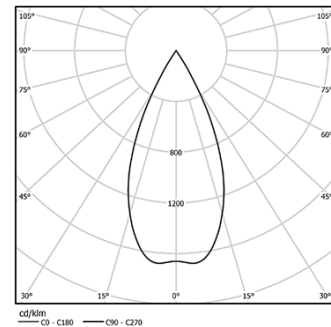


Beam angle
Flood 59°

Application

Weight
0,64Kg

mm

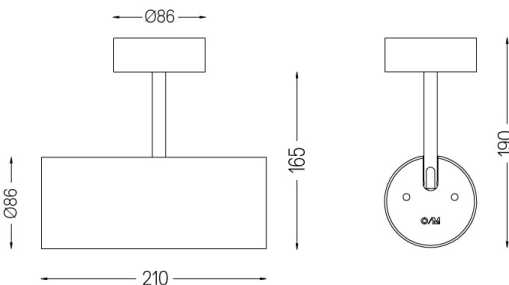

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class F
Model Identifier 2053560247H