

9,8W / 770lm / 3000K / On/Off / Medium 41°
/ ø85mm

60277




Design: O/M + Bartenbach GmbH
 Track-mounted spotlight with die-cast aluminium body with electrostatic 100% polyester paint finish. Spot-lens with individual complex surface rips to provide a focal light and an extremely narrow beam. Orientable by 90° horizontal rotation and 330° vertical rotation. Driver included.

LED CRI>90 / >50.000h, L80/B10
 2-step MacAdam / Driver included.
 IP20 | 230Vac | 50/60Hz



LED 3000K

	Light Source	Luminaire
Power	9,8W	12,3W
Flux	1035lm	770lm
Efficiency	106lm/W	63lm/W
LOR	-	74%
Operating Condition	-	230Vac




Beam angle
Medium 41°

Application

Weight
0,64Kg

mm

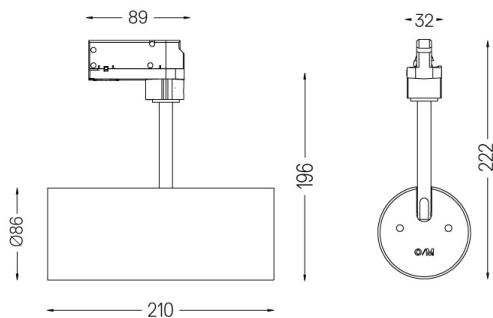

Finishes

- .01** White / RAL 9010
- .02** Black / RAL 9005

Data according to regulations

2019/2020/EU supplemented by 2021/341 |2019/2015/EU
 supplemented by 2021/340/EU Energy Consumption Labelling
 Ordinance. This product contains a light source of efficiency class F
 Model Identifier 2053560257H