

10W / 780lm / 2700K / On/Off / Spot 12° /
ø45mm

60292



Design: O/M

Recessed adjustable spotlight with aluminium body.

The spotlight can be rotated up to 90° horizontally and 330° vertically.

Easy recessing system with spring clips.

Accessories available separately and easily applicable after installation.

LED CRI>90 / >50.000h, L80/B10
2-step MacAdam / Power supply included.
IP20 | 230Vac | 50/60Hz



2700K

Light Source

Luminaire


Power 10W 12,5W

Flux 955lm 780lm

Efficiency 96lm/W 62lm/W

LOR - 82%

UGR - <13



Beam angle
Spot 12°



Weight
0,6Kg

□ mm

194x26


Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Optional

- 59016 Elliptical refractor
Ø39x0,5mm
- 59017 Soft diffuser
Ø39x0,5mm
- 59018 Louvre
Ø39x3mm
- 59019 Snoot 72mm
Ø45x72

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

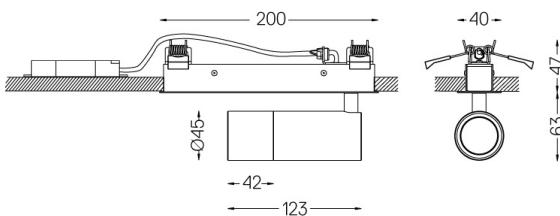

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU

supplemented by 2021/340/EU Energy Consumption Labelling

Ordinance. This product contains a light source of efficiency class F

Model Identifier 2053560245H