

10W / 780lm / 2700K / DALI / Spot 12° /  
ø45mm

60294



Design: O/M  
Recessed adjustable spotlight with aluminium body.  
The spotlight can be rotated up to 90° horizontally  
and 330° vertically.  
Easy recessing system with spring clips.  
Accessories available separately and easily applicable  
after installation.

LED CRI>90 / >50.000h, L80/B10  
2-step MacAdam / Power supply included.  
IP20 | 230Vac | 50/60Hz



2700K

**Light Source**

**Luminaire**


**Power** 10W 12,5W

**Flux** 955lm 780lm

**Efficiency** 96lm/W 62lm/W

**LOR** - 82%

**UGR** - <13



**Beam angle**  
**Spot 12°**




**Weight**  
**0,6Kg**

□ mm

194x26

**Finishes**

- .01 White / RAL 9010
- .02 Black / RAL 9005

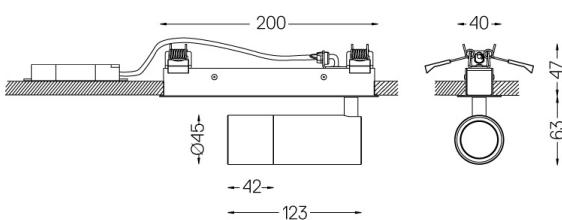

**Optional**

- 59016 Elliptical refractor  
Ø39x0,5mm
- 59017 Soft diffuser  
Ø39x0,5mm
- 59018 Louvre  
Ø39x3mm
- 59019 Snoot 72mm  
Ø45x72

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

The cutout dimensions are for plasterboard ceilings. For other type of  
material please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class F  
Model Identifier 2053560245H